



Designation: E1123 – 86 (Reapproved 2023)

Standard Practices for Mounting Test Specimens for Sound Transmission Loss Testing of Naval and Marine Ship Bulkhead Treatment Materials¹

This standard is issued under the fixed designation E1123; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 These practices describe test specimen mountings to be used for naval and marine ship applications during sound transmission loss tests performed in accordance with Test Method E90.

1.2 The structure specified in these practices is intended for mounting of single-layer treatments or composite treatments consisting of various materials and configurations. Acoustical treatment materials may be combinations of acoustical absorbent materials, limp mass septums, and insulation materials.

1.3 The values stated in SI units are to be regarded as the standard. The values in parentheses are for information only.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

C634 Terminology Relating to Building and Environmental Acoustics

E90 Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

¹ These practices are under the jurisdiction of ASTM Committee E33 on Building and Environmental Acoustics and are the direct responsibility of Subcommittee E33.10 on Structural Acoustics and Vibration.

Current edition approved Jan. 1, 2023. Published February 2023. Originally approved in 1986. Last previous edition approved in 2016 as E1123 – 86 (2016). DOI: 10.1520/E1123-86R23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

3. Significance and Use

3.1 The sound transmission loss provided by a material that covers a flat surface depends not only on the physical properties of the material but also on the type of structure to which it is mounted and the mounting method used.

3.2 Naval and marine architects and design engineers require specific transmission loss characteristics of acoustical treatment materials as they would exhibit installed on a ship's structure. The mounting structure and procedures specified in these practices are intended to simulate such a shipboard environment.

3.3 Test reports may refer to this mounting by Practices E1123 instead of providing a detailed description of the mounting used.

4. Mounting Structure and Methods

4.1 The mounting structure consists of a fabricated aluminum bulkhead. This bulkhead is designed to fit within a 2.44-m (8-ft) opening in the filler walls between the reverberation rooms of a test facility. Test result measurements due to the effects of the filler walls may be accounted for as specified in Test Method E90. A larger mounting structure may be used if it can be demonstrated that this structure yields results comparable to the 2.44 by 2.44-m (8 by 8-ft) mounting structure.

4.1.1 The bulkhead is fabricated in two sections, 1.22 by 2.44 m (4 by 8 ft) and is fastened together by a 10.2 by 10.2 by 10.2-cm (4 by 4 by 4-in.) aluminum I-beam.


4.1.2 The coupling is accomplished by using 8-mm (5/16-in.) SAE grade B steel stove bolts, torqued to 3.33 m/kg (25 ft/lb).

4.1.3 The 6.4-mm (1/4-in.) sheet aluminum panels, 1.22 by 2.44 m (4 by 8 ft), are supported with 10.2 by 10.2 cm (4 by 4 in.), 2.976-kg per linear metre (2-lb per linear ft) tee beams.


4.1.3.1 The tee beams are welded to the 6.4-mm (1/4-in.) aluminum sheets with welds on either side of the center member of the tee at 53.3-cm (21-in.) intervals.

4.1.3.2 Weld areas should be approximately 7.6 cm (3 in.) long. Welding in excess of these intervals may cause severe warpage of the bulkhead. The tee beams are positioned on the


FRONT VIEW PRE-FAB BULKHEAD SECTION

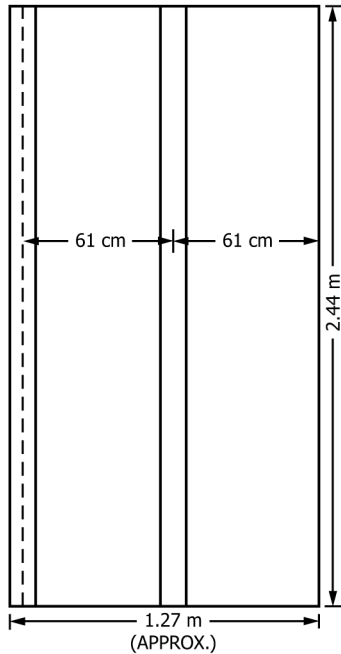


FRONT VIEW PRE-FAB BULKHEAD SECTIONS, JOINED

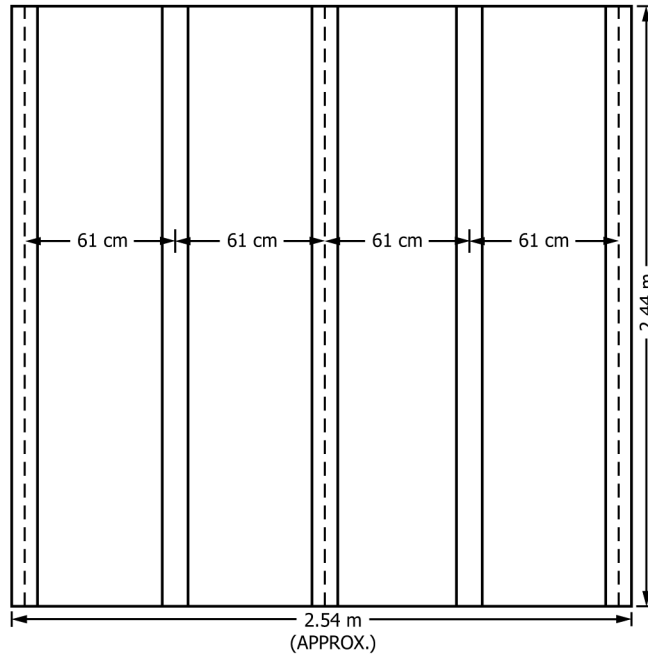


DETAIL A




DETAIL B



TOP VIEW PRE-FAB BULKHEAD SECTION



TOP VIEW PRE-FAB BULKHEAD SECTIONS, JOINED



NOTE 1—6.4-mm sheet plate.

NOTE 2—10.2 by 10.2-cm tees, 2.976 kg per linear metre.

NOTE 3—Two 1.22 by 2.44-m bulkhead sections joined with I-beam using 8-mm bolts.

NOTE 4—Bulkhead sections delivered unassembled.

FIG. 1 Aluminum Bulkhead Details

aluminum sheets to obtain a distance of 61 cm (2 ft) between tee beam centers with the I-beam serving as the bulkhead center support.

4.1.4 Fig. 1 illustrates the construction details. The bulkhead shall be installed with the smooth side facing the acoustical source room and fastened in the filler wall opening by any means which will provide a secure, rigid structure. Tapered wooden wedges driven between the filler wall at each tee beam support will provide the necessary rigidity. Acoustical sealant shall be applied around the bulkhead edges, between the filler wall and the bulkhead and the I-beam panel connector to ensure an airtight seal. This seal should be confirmed by energizing the acoustical source and listening for spurious noise transmission around the sealed perimeter crevices with a stethoscope on the receiver room side.

4.2 Self-adhesive insulation anchors (stud pins) with 5.1 by 5.1-cm (2 by 2-in.) galvanized steel plates and 12 gage spindles (minimum) shall be installed on the smooth side of the bulkhead (source room side) and shall have the following dimensions:

4.2.1 Stud pins shall be placed on centers not exceeding 30.5 cm (12 in.).

4.2.2 Stud pins shall not be more than 15.2 cm (6 in.) from the edge of the treatment material except for center panel support when a 5-point anchor pattern is used on a 61 by 91.4-cm (2 by 3-ft) panel.

4.2.3 Stud pin length shall be sufficient to accommodate mounting of the maximum thickness of the specimen materials to be tested.

4.2.4 A typical stud pin pattern is shown in Fig. 2.

4.3 Acoustical treatment material shall be secured on the stud pins using self-locking galvanized steel washers, 3.8 cm (1½ in.) in diameter. Self-locking washers shall be used only where required to hold treatment materials securely against the bulkhead. Lightweight backing materials used in multiple-layer treatments generally will not require self-locking washers.

4.4 Acoustical treatment materials shall be installed on the aluminum bulkhead as they would be applied on a ship. Butt joints of the acoustical material panels shall be as tight and as evenly aligned as possible.

4.5 When limp mass septums are applied, the following procedures shall be followed: