



Designation: F1334 – 24

Standard Test Method for Determining A-Weighted Sound Power Level of Vacuum Cleaners¹

This standard is issued under the fixed designation F1334; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method calculates the overall A-weighted sound power level emitted by small portable upright, canister, combination vacuum cleaners, backpack vacuum cleaners, hard-floor cleaning machines, extractors, and central vacuum cleaner motorized nozzles intended for operation in domestic and commercial applications.

1.1.1 To determine the Sound Power Level of a central vacuum at the power unit location refer to Test Method F2544.

1.2 A-weighted sound pressure measurements are performed on a stationary vacuum cleaner, extractor, hard-floor cleaning machine, or backpack vacuum cleaner in a semi-reverberant room. This test method determines sound power by a comparison method for small noise sources, that is, comparison to a broadband reference sound source.

1.3 This test method describes a procedure for determining the approximate A-weighted sound power level of small noise sources. This test method uses a non-special semi-reverberant room.

1.4 Results are expressed as A-weighted sound power level in decibels (referenced to one picowatt).

1.5 The values stated in inch-pound units are to be regarded as the standard. The values in parentheses are for information only.

NOTE 1—The F11.21 subcommittee is actively pursuing new market relevant carpets with the assistance of the carpet industry. Although plush and Freize carpet panels are no longer available for purchase, some laboratories may still have samples for testing. In such cases, the table values remain valid.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

¹ This test method is under the jurisdiction of ASTM Committee F11 on Vacuum Cleaners and is the direct responsibility of Subcommittee F11.25 on Sound Measurement.

Current edition approved Jan. 1, 2024. Published February 2024. Originally approved in 1991. Last previous edition approved in 2018 as F1334 – 18. DOI: 10.1520/F1334-24.

1.7 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 ASTM Standards:²

C634 Terminology Relating to Building and Environmental Acoustics

E177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods

E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

F608 Test Method for Evaluation of Carpet Embedded Dirt Removal Effectiveness of Household/Commercial Vacuum Cleaners

F655 Specification for Test Carpets and Pads for Vacuum Cleaner Testing (Withdrawn 2022)³

F2544 Test Method for Determining A-Weighted Sound Power Level of Central Vacuum Power Units

F2607 Test Method for Measuring the Hard Surface Floor-Cleaning Ability of Household/Commercial Vacuum Cleaners

2.2 ANSI Standards:⁴

ANSI S1.10 Method for the Calibration of Microphones

ANSI S1.43 Specifications for Integrating-Averaging Sound Level Meters

ANSI S12.51/ISO 3741 Acoustics - Determination of sound power levels of noise sources using sound pressure - Precision methods for reverberation rooms

ANSI S12.53/ISO 3743 Acoustics - Determination of sound power levels of noise sources - Engineering methods for small, movable sources in reverberant fields

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

⁴ Available from American National Standards Institute, 11 W. 42nd St., 13th Floor, New York, NY 10036.

ANSI S12.57/ISO 3747 Standard Acoustics - Determination of sound power levels of noise sources using sound pressure - Comparison method in situ

2.3 ISO Standards:⁵

ISO 11201 Acoustics – Noise emitted by machinery and equipment – Determination of emission sound pressure levels at a work station and at other specified positions in an essentially free field over a reflecting plane with negligible environmental corrections

3. Terminology

3.1 Definitions:

3.1.1 *population*, *n*—the total of all of the units of the particular model or type, or both, of vacuum cleaner being tested.

3.1.2 *population sample or sample*, *n*—three or more test units, randomly taken from the population.

3.1.3 *reference sound source (RSS)*, *n*—a standard source of broadband sound with a certified set of sound power emissions.

3.1.4 *source*, *n*—a device that emits sound. This may be the vacuum cleaner or a motorized nozzle.

3.1.5 *test unit or unit*, *n*—a single vacuum cleaner, nozzle, or hard-floor machine of the model or type, or both, being tested.

3.1.6 Unless otherwise indicated, definitions are in accordance with Terminology C634.

4. Significance and Use

4.1 The test results enable the comparison of A-weighted sound emission from vacuum cleaners, backpack vacuum cleaners, extractors, or hard-floor cleaning machines when tested under the condition of this test method.

5. Test Room Requirements

5.1 The test room shall be semi-reverberant. It shall contain sufficiently little sound absorption material so the requirements of 5.2 can be met. It should be large enough to meet the dimension requirements of 5.2.

5.1.1 When a central vacuum cleaner motorized nozzle is to be tested, the test room should be plumbed for a central vacuum system according to the manufacturer's instructions using standard 2.00-in. diameter thin-wall PVC tubing. A single wall inlet shall be located in the test room.

5.2 Identify a location on the test room floor which can accommodate six equally spaced microphone positions 60° apart located at a height of 60 in. (1.5 m) above the floor on a 12 ft (3.6 m) diameter circle the center of which is the center of the sound source. These positions shall result in a standard deviation of the six sound pressure measurements of not more than 2.3 dB when measuring the reference sound source. This location is suitable for the vacuum cleaner and reference sound source for this test method. Refer to Figs. 1-4 for typical layouts.

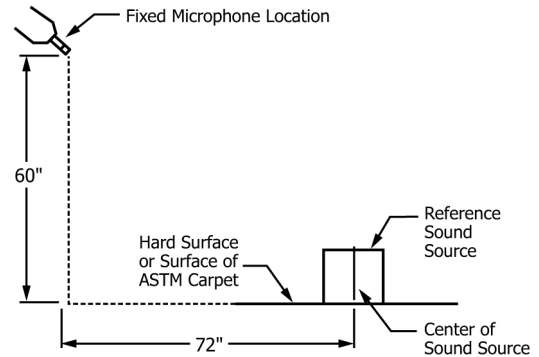


FIG. 1 Sound Set Up

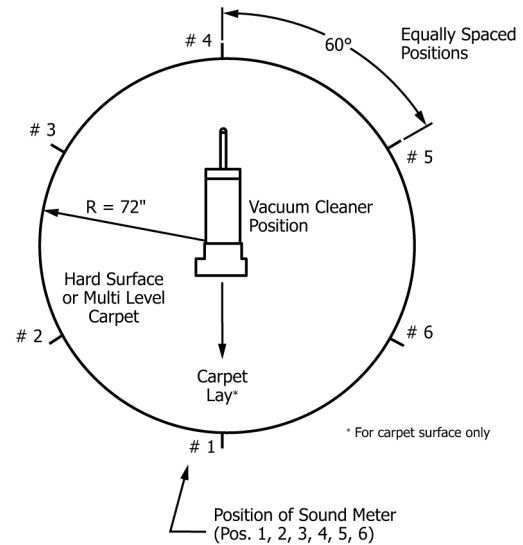


FIG. 2 Sound Test Pattern for Uprights, Extractors, and Hard-floor Cleaning Machines

5.2.1 Use the same microphone setup for both canister and backpack vacuums. Backpack vacuums shall be mounted 32 in. (800 mm) from the floor to the bottom of the backpack vacuum. The means of mounting shall not interfere with the backpack operation or cause vibration when mounted.

5.3 *Environmental*—Ambient test conditions within the test room shall be controlled to within $70 \pm 5^\circ\text{F}$ ($21 \pm 3^\circ\text{C}$) and 30 to 70 % relative humidity.

5.4 Also, any room which has qualified in accordance with ANSI S12.51/ISO 3741, ANSI S12.53/ISO 3743, and ANSI S12.57/ISO 3747 may be used to measure the sound power levels of vacuum cleaners, motorized nozzles, or hard-floor machines.

5.5 The measured A-weighted sound pressure levels shall be corrected for the influence of background noise according to Table 1. When the steady background-noise sound pressure level is more than 6 dB below the sound pressure level at each measurement point, the measured A-weighted sound pressure levels shall be corrected for the influence of background noise according to Table 1. If this difference is less than 6 dB no correction is allowed, and any reported data must include a

⁵ Available from International Organization for Standardization (ISO), ISO Central Secretariat, BIBC II, Chemin de Blandonnet 8, CP 401, 1214 Vernier, Geneva, Switzerland, <http://www.iso.org>.