



Designation: F1502 – 23

Standard Test Method for Static Measurements on Tires for Passenger Cars, Light Trucks, and Medium Duty Vehicles¹

This standard is issued under the fixed designation F1502; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers methods for performing certain mechanical static measurements on tires. The term “static” implies that the tire is not rotating while measurements are being made.

1.2 The values stated in SI units are to be regarded as standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D2240 Test Method for Rubber Property—Durometer Hardness

D4483 Practice for Evaluating Precision for Test Method Standards in the Rubber and Carbon Black Manufacturing Industries

F421 Test Method for Measuring Groove and Void Depth in Passenger Car Tires

F538 Terminology Relating to Characteristics and Performance of Tires

F870 Practice for Tread Footprints of Passenger Car Tires

¹ This test method is under the jurisdiction of ASTM Committee F09 on Tires and is the direct responsibility of Subcommittee F09.30 on Laboratory (Non-Vehicular) Testing.

Current edition approved May 1, 2023. Published May 2023. Originally approved in 1994. Last previous edition approved in 2016 as F1502 – 05 (2016). DOI: 10.1520/F1502-23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

Groove Area Fraction and Dimensional Measurements

3. Terminology

3.1 *Definitions:*

3.1.1 *outside diameter, n*—the maximum diameter of a tire when it is mounted and inflated. **F538**

3.1.2 *overall width, n*—the maximum cross-sectional width of a tire, including protective or decorative ribs. **F538**

3.1.3 *tire weight, n*—the weight of an unmounted tire without tube or flap. **F538**

3.1.4 *tread arc width, n*—the length of the arc measured from one extreme of the tread design proper to the opposite extreme; that is, from shoulder to shoulder perpendicular to the circumferential center line. **F538**

3.1.5 *tread hardness, n*—the hardness of an element in the tread design as measured by a designated standard gage. **F538**

3.1.6 *tread radius, n*—the radius of a circle whose arc best fits the tread surface when the appropriate radius template is held perpendicular to the circumferential center line of an inflated tire. **F538**

4. Significance and Use

4.1 Static measurements of tires are important to tire manufacturers, processing engineers, and vehicle design engineers for purposes of commerce (in consumer/vendor agreements) and in tire research and development.

4.2 The procedures are sufficiently detailed to achieve commercially acceptable reproducibility among laboratories and may therefore be used for specification, compliance, or reference purposes.

4.3 Changes attributable to growth after inflation may be obtained by comparing measurements made immediately after inflation with those made 18 to 24 h later.

5. Tire Marking

5.1 For measurements other than weight, the tire shall be marked at six equally spaced locations around the circumference. Starting at the DOT tire identification number (outboard side if applicable) or other serial number, make radial lines from bead to bead, perpendicular to the tread center line, at 60°

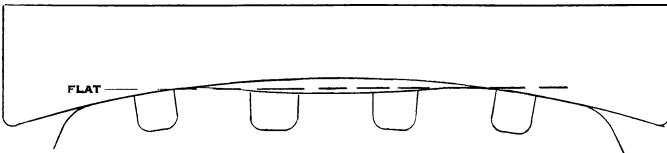


FIG. 1 Type C: Tread Contour with a Center-Low Oxbow

intervals. Number the resulting sections “1” through “6” in a clockwise sequence as viewed, if applicable, from the outboard side, containing the tire identification or serial number.

6. Procedures

6.1 Tire Weight:

6.1.1 Weigh the test tire on a scale with accuracy to 0.045 kg (0.1 lb) in the required range. A scale of 0-90 kg (0-200 lb) has been found to be satisfactory for tires within the scope of this test method.

6.1.2 The scale used should be calibrated with weights traceable to the National Institute of Standards Technology (NIST).

6.2 Outside Diameter:

6.2.1 Mount the test tire on a rim of the correct diameter for the tire size and the measuring rim width listed for that tire in the current yearbook of the Tire and Rim Association³ (or other applicable document^{4,5}), unless another width is chosen.

6.2.2 Inflate the tire to the maximum pressure given on the sidewall or associated with the maximum load, unless another pressure has been chosen. Do not exceed the maximum pressure given on the sidewall. Record the value used. Allow 24 h for inflation growth and adjust pressure if necessary.

6.2.3 The wheel and inflated tire assembly shall be in temperature equilibrium with the environment in which the measurements are to be made. This can usually be achieved after 3 h at room temperature, $24 \pm 8^\circ\text{C}$ ($75 \pm 15^\circ\text{F}$). Record ambient temperature at the time of measurements.

6.2.4 Anchor the end of a “diameter” (pi) tape in the tread center (or other maximum diameter location, in cases such as a center low oxbow contour (Fig. 1)), at any circumferential location. Use a thumbtack if necessary. See Fig. 2.

6.2.5 Carefully align the tape around the tire circumference so that it is parallel to the plane of the tread center line. Read and record the indicated diameter.

6.3 Overall Width:

6.3.1 Mount and condition the test tire as in 6.2.1 – 6.2.3.

6.3.2 Use an outside caliper or other direct-reading device that is graduated in 0.25 mm (0.01 in.) increments. See Figs. 3 and 4.

6.3.3 The measured overall width shall include the highest protective side ribs, bars, and decorations on both sidewalls.



FIG. 2 Outside Diameter Measurement



FIG. 3 Overall Width Measurement



FIG. 4 Overall Width Measurement

³ Current yearbook of the Tire and Rim Association available from the Tire and Rim Association, Inc., 4000 Embassy Parkway, Suite 390, Akron, Ohio 44333, <https://www.us-tra.org>.

⁴ Current yearbook of the European Tyre and Rim Technical Organization available from the ETRTO, Avenue d'Auderghem, 22 - 28 Box 9 - B-1040, Brussels, Belgium, <https://www.etrto.org>.

⁵ Current yearbook of the Japan Automotive Tire Manufacturers' Association Inc. available from JATMA, 8th floor, No. 33 Mori Bldg., 3-8-21 Toranomon Minato-ku, Tokyo, Japan 105-0001, <https://www.jatma.or.jp>.

6.3.4 Section width can be obtained by subtracting heights of sidewall protuberances from the overall width obtained in 6.3.3.