



Designation: D2879 – 23

Standard Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isoteniscope¹

This standard is issued under the fixed designation D2879; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope*

1.1 This test method covers the determination of the vapor pressure of pure liquids, the vapor pressure exerted by mixtures in a closed vessel at $40\% \pm 5\%$ ullage, and the initial thermal decomposition temperature of pure and mixed liquids. It is applicable to liquids that are compatible with borosilicate glass and that have a vapor pressure between 133 Pa (1.0 torr) and 101.3 kPa (760 torr) at the selected test temperatures. The test method is suitable for use over the range from ambient to 623 K. The temperature range may be extended to include temperatures below ambient provided a suitable constant-temperature bath for such temperatures is used.

NOTE 1—The isoteniscope is a constant-volume apparatus and results obtained with it on other than pure liquids differ from those obtained in a constant-pressure distillation.

1.2 Most petroleum products boil over a fairly wide temperature range, and this fact shall be recognized in discussion of their vapor pressures. Even an ideal mixture following Raoult's law will show a progressive decrease in vapor pressure as the lighter component is removed, and this is vastly accentuated in complex mixtures such as lubricating oils containing traces of dewaxing solvents, etc. Such a mixture may well exert a pressure in a closed vessel of as much as 100 times that calculated from its average composition, and it is the closed vessel which is simulated by the isoteniscope. For measurement of the apparent vapor pressure in open systems, Test Method D2878, is recommended.

1.3 The values stated in SI units are to be regarded as standard. The values given in parentheses after SI units are provided for information only and are not considered standard.

1.4 **WARNING**—Mercury has been designated by many regulatory agencies as a hazardous substance that can cause serious medical issues. Mercury, or its vapor, has been dem-

onstrated to be hazardous to health and corrosive to materials. Use caution when handling mercury and mercury-containing products. See the applicable product Safety Data Sheet (SDS) for additional information. The potential exists that selling mercury or mercury-containing products, or both, is prohibited by local or national law. Users must determine legality of sales in their location.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use. For specific warning statements, see 6.10, 6.12, and Annex A2.*

1.6 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D2878 Test Method for Estimating Apparent Vapor Pressures and Molecular Weights of Lubricating Oils

D4175 Terminology Relating to Petroleum Products, Liquid Fuels, and Lubricants

E230 Specification for Temperature-Electromotive Force (emf) Tables for Standardized Thermocouples

3. Terminology

3.1 *Definitions:*

3.1.1 For definitions of terms used in this test method, refer to Terminology D4175.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *ullage, n*—that percentage of a closed system which is filled with vapor.

¹ This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products, Liquid Fuels, and Lubricants and is the direct responsibility of Subcommittee D02.L0.07 on Engineering Sciences of High Performance Fluids and Solids (Formally D02.1100).

Current edition approved Dec. 1, 2023. Published December 2023. Originally approved in 1970. Last previous edition approved in 2018 as D2879 – 18. DOI: 10.1520/D2879-23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard

3.2.1.1 *Discussion*—Specifically, on Fig. 1, that portion of the volume of the isoteniscope to the right of point A that is filled with vapor.

3.3 Symbols:

- C = temperature, °C,
 K = temperature, K,
 p = pressure, Pa or torr,
 P_e = experimentally measured total system pressure,
 P_a = partial pressure due to fixed gases dissolved in sample,
 P_c = corrected vapor pressure, Pa or torr.
 t = time, s,

$$K = C + 273.15 \quad (1)$$

4. Summary of Test Method

4.1 Dissolved and entrained fixed gases are removed from the sample in the isoteniscope by heating a thin layer of a sample at reduced pressure, removing in this process the minimum amount of volatile constituents from the sample.

4.2 The vapor pressure of the sample at selected temperatures is determined by balancing the pressure due to the vapor of the sample against a known pressure of an inert gas. The manometer section of the isoteniscope is used to determine pressure equality.

4.3 The initial decomposition temperature is determined from a plot of the logarithm of the vapor pressure versus the reciprocal of absolute temperature. The initial decomposition temperature is taken as that temperature at which the plot first departs from linearity as a result of the decomposition of the sample. An optional method provides for the use of isothermal rates of pressure rise for this purpose (see Annex A1). These are measured at several temperatures and the logarithm of the rate of pressure rise is plotted versus the reciprocal of absolute temperature. The decomposition temperature of the sample is taken to be that temperature at which the rate of increase of pressure is sufficient to produce a rise of 185 Pa (0.0139 torr/s).

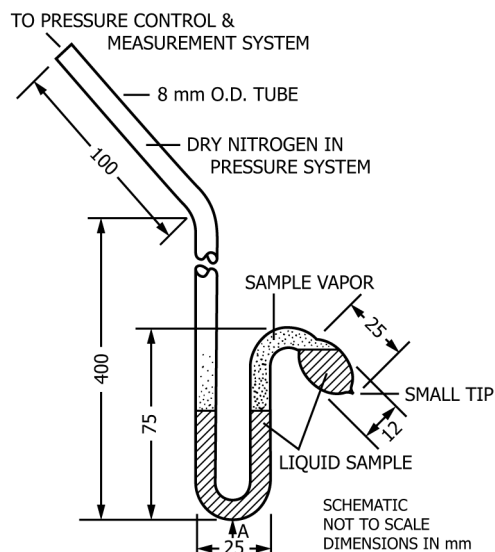


FIG. 1 Isoteniscope

NOTE 2—Vapor pressures less than 133 Pa (1.0 torr), but greater than 13.3 Pa (0.1 torr) at a selected test temperature can be determined directly with reduced accuracy. In some cases the tendency of the sample to retain dissolved or occluded air may prevent direct determinations of vapor pressure in this range. In such cases, data points obtained at higher pressures can be extrapolated to yield approximate vapor pressures in this range.

5. Significance and Use

5.1 The vapor pressure of a substance as determined by isoteniscope reflects a property of the sample as received including most volatile components, but excluding dissolved fixed gases such as air. Vapor pressure, *per se*, is a thermodynamic property which is dependent only upon composition and temperature for stable systems. The isoteniscope method is designed to minimize composition changes which may occur during the course of measurement.

6. Apparatus

6.1 *Isoteniscope* (Fig. 1).

6.2 *Constant-Temperature Air Bath*—(Fig. 2) for use over the temperature range from ambient to 623 K, controlled to ± 2 K in the zone occupied by the isoteniscope beyond point “A” (Fig. 1).

6.3 *Temperature Controller*.

6.4 *Vacuum and Gas Handling System* (Fig. 3).

6.5 *Pressure Measurement Instrumentation*—Pressure transducers of suitable ranges are the preferred means for the measurement of pressure in the gas handling system. Alternatively bourdon-type vacuum gauges or liquid manometers may be used. Note that more than one gauge or transducer may be required for use over the range of 2.00 kPa (15 torr) to 101 kPa (760 torr) for pressures.

6.6 *McLeod Vacuum Gauge*—0 kPa to 2.00 kPa (0 torr to 15 torr), vertical primary standard type.

6.7 *Mechanical Two-Stage Vacuum Pump*.

6.8 *Direct Temperature Readout*, either potentiometric or electronic.

6.9 *Thermocouple*—in accordance with American National Standard for Temperature Measurement Thermocouples (ANSI C96.1) from Specification and Temperature Electromotive Force Tables E230.

6.10 *Nitrogen*—pre-purified grade. (**Warning**—Compressed gas under high pressure. Gas reduces oxygen available for breathing. See A2.1.)

6.11 *Nitrogen Pressure Regulator*—single-stage, 0 kPa to 345 kPa gauge (0 psig to 50 psig).

6.12 *Alcohol Lamp*—(**Warning**—Flammable. Denatured alcohol cannot be made nontoxic. See A2.2.)

7. Hazards

7.1 The apparatus includes a vacuum system and a Dewar flask (constant temperature air bath) that is subjected to elevated temperatures. Suitable means should be employed to protect the operator from implosion of these systems. These