



Designation: D4440 – 23

Standard Test Method for Plastics: Dynamic Mechanical Properties Melt Rheology¹

This standard is issued under the fixed designation D4440; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope*

1.1 This test method outlines the use of dynamic mechanical instrumentation in determining and reporting the rheological properties of thermoplastic resins and other types of molten polymers. The method is useful for determining the complex viscosity and other significant viscoelastic characteristics of such materials as a function of frequency, strain amplitude, temperature, and time. It is known that fillers and other additives influence rheological properties.

1.2 It incorporates a laboratory test method for determining the relevant rheological properties of a polymer melt subjected to various oscillatory deformations on an instrument of the type commonly referred to as a mechanical or dynamic spectrometer.

1.3 This test method is intended to provide a means of determining the rheological properties of molten polymers, such as thermoplastics and thermoplastic elastomers over a range of temperatures by nonresonant, forced-vibration techniques. Plots of modulus, viscosity, and tan delta as a function of dynamic oscillation (frequency), strain amplitude, temperature, and time are indicative of the viscoelastic properties of a molten polymer.

1.4 This test method is valid for a wide range of frequencies, typically from 0.01 Hz to 100 Hz.

1.5 This test method is intended for homogenous and heterogeneous molten polymeric systems and composite formulations containing chemical additives, including fillers, reinforcements, stabilizers, plasticizers, flame retardants, impact modifiers, processing aids, and other important chemical additives often incorporated into a polymeric system for specific functional properties, and which could affect the processability and functional performance. These polymeric material systems have molten viscosities typically less than 10^6 Pa·s (10^7 poise).

1.6 Test data obtained by this test method are relevant and appropriate for use in engineering design.

1.7 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.8 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

NOTE 1—This test method is equivalent to ISO 6721, Part 10.

1.9 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D883 Terminology Relating to Plastics

D4000 Classification System for Specifying Plastic Materials

D4065 Practice for Plastics: Dynamic Mechanical Properties: Determination and Report of Procedures

D4092 Terminology for Plastics: Dynamic Mechanical Properties

E456 Terminology Relating to Quality and Statistics

E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

2.2 *ISO Standard:*³

ISO 6721, Part 10 Plastics—Determination of Dynamic Mechanical Properties, Part 10, Complex Shear Viscosity Using a Parallel-Plate Oscillatory Rheometer

3. Terminology

3.1 *Definitions*—Terms used in this standard are defined in accordance with Terminology D4092 and Terminology D883 unless otherwise specified. For terms relating to precision and

¹ This test method is under the jurisdiction of ASTM Committee D20 on Plastics and is the direct responsibility of Subcommittee D20.10 on Mechanical Properties.

Current edition approved Oct. 1, 2023. Published November 2023. Originally approved in 1984. Last previous edition approved in 2015 as D4440 - 15. DOI: 10.1520/D4440-23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

*A Summary of Changes section appears at the end of this standard

bias and other associated statistical issues, the terms used in this standard are defined in accordance with Terminology E456.

4. Summary of Test Method

4.1 A known amount of thermoplastic polymer (molten powder or pellet, or solid preform disk) is placed in mechanical oscillation at a fixed or varying frequency at isothermal conditions or over a linear temperature increase or a time-temperature relation simulating a processing condition. Storage (elastic) modulus, G' or loss (viscous) modulus, G'' , or both, or the corresponding dynamic viscosity functions $n' = g''/\omega$ and $n'' = g'/\omega$, of the polymeric material specimen are measured in shear as a function of frequency, strain, temperature, or time.

5. Significance and Use

5.1 This test method provides a simple means of characterizing the important rheological properties and viscosity of thermoplastic polymers using very small amounts of material (approximately 25 to 50 mm in diameter by 1 to 3 mm in thickness ... approximately 3 to 5 g). Data are generally used for quality control, research and development, and establishment of optimum processing conditions.

5.2 Dynamic mechanical testing provides a sensitive method for determining molten polymer properties by measuring the elastic and loss moduli as a function of frequency, strain, temperature, or time. Plots of viscosity, storage, and loss moduli, and tan delta as a function of the aforementioned process parameters provide graphical representation indicative of molecular weight, molecular weight distribution, effects of chain branching, and melt-processability for specified conditions.

5.2.1 Observed data are specific to experimental conditions. Reporting in full (as described in this test method) the conditions under which the data was obtained is essential to assist users with interpreting the data and reconciling apparent or perceived discrepancies.

5.3 Values obtained in this test method can be used to assess the following:

5.3.1 Complex viscosity of the polymer melt as a function of dynamic oscillation,

5.3.2 Processing viscosity, minimum as well as changes in viscosity as a function of experimental parameters,

5.3.3 Effects of processing treatment,

5.3.4 Relative polymer behavioral properties, including viscosity and damping, and

5.3.5 Effects of formulation additives that might affect processability or performance.

5.4 Before proceeding with this test method, refer to the specification for the material being tested. Any test specimen preparation, conditioning, dimensions, or testing parameters, or combination thereof, covered in the relevant ASTM materials specification shall take precedence over those mentioned in the test method. If there are no relevant ASTM material specifications, then the default conditions apply.

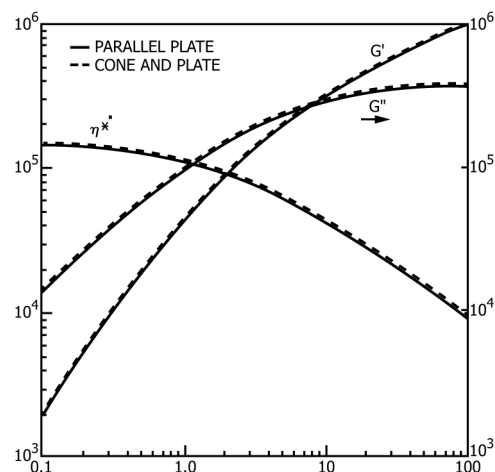


FIG. 1 Rheological Properties of a Polymer Melt

6. Interferences

6.1 Since small quantities of polymer are used, it is essential that the specimens be homogeneous and representative.

6.2 Toxic or corrosive effluents, or both, have the potential to be released when heating the polymer specimen to its molten state and could be harmful to personnel or to the instrumentation.

6.3 Entrapped air/gas has the potential to affect the results obtained using powder or pellet-type samples.

7. Apparatus

7.1 The function of the apparatus is to hold a molten polymer of known volume and dimensions so that the material acts as the elastic and dissipative element in a mechanically driven oscillatory system, as outlined in Practice D4065. These instruments operate in one or more of the following modes for measuring rheological behavior in dynamic oscillatory shear: (1) forced constant amplitude, fixed frequency, (2) forced constant amplitude, varying frequency, and (3) forced varying amplitude, fixed frequency.

7.2 The apparatus shall consist of the following:

7.2.1 *Test Fixtures*—A choice of either polished cone and plate (having a known cone angle) or parallel plates having either smooth, polished, or serrated surfaces. Variations of this tooling, such as bottom plates with concentric overflow rims, can be used as necessary.

7.2.2 *Oscillatory Deformation (Strain)*—A device for applying a continuous oscillatory deformation (strain) to the specimen.

7.2.3 *Detectors*—A device or devices for determining dependent and independent experimental parameters, such as force (stress or strain), frequency, and temperature. Measure temperature with a precision of $\pm 1^\circ\text{C}$, frequency to $\pm 1\%$, strain to $\pm 1\%$, and force to $\pm 1\%$.

7.2.4 *Temperature Controller and Oven*—A device for controlling the specimen temperature, either by heating (in steps or ramps), cooling (in steps or ramps), or maintaining a constant specimen environment, or a combination thereof. Fig. 1 illustrates several time-temperature profiles. Use a temperature