



Standard Specification for Crosslinked Polyethylene (PEX) Tubing¹

This standard is issued under the fixed designation F876; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope*

1.1 This specification covers crosslinked polyethylene (PEX) tubing that incorporates an optional polymeric inner, middle or outer layer and that is outside diameter controlled, made in nominal SDR9 tubing dimension ratios except where noted, and pressure rated for water at three temperatures (see [Appendix X1](#)). Included are requirements and test methods for material, workmanship, dimensions, burst pressure, hydrostatic sustained pressure, excessive temperature and pressure, environmental stress cracking, stabilizer functionality, bent-tube hydrostatic pressure, oxidative stability in potable chlorinated water, UV resistance, and degree of crosslinking. Requirements for tubing markings are also given. The components covered by this specification are intended for use in, but not limited to, residential and commercial, hot- and cold-potable water distribution systems, reclaimed water, fire protection, municipal water service lines, building supply lines, radiant heating and cooling systems, hydronic distribution systems, snow and ice melting systems, geothermal ground loops, district heating, turf conditioning, compressed air distribution and building services pipe, provided that the PEX tubing covered herein complies with applicable code requirements.

1.2 The text of this specification references notes, footnotes, and appendixes which provide explanatory material. These notes and footnotes (excluding those in tables and figures) shall not be considered as requirements of the specification.

1.3 The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system are not necessarily exact equivalents; therefore, to ensure conformance with the standard, each system shall be used independently of the other, and values from the two systems shall not be combined. The values given in parentheses are mathematical conversions that may not be exact equivalents to either SI units or inch-pound units and that are provided for information only.

1.4 The following safety hazards caveat pertains only to the test methods portion, Section 7, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 ASTM Standards:²

- D618 Practice for Conditioning Plastics for Testing
- D792 Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement
- D1505 Test Method for Density of Plastics by the Density-Gradient Technique
- D1598 Test Method for Time-to-Failure of Plastic Pipe Under Constant Internal Pressure
- D1599 Test Method for Resistance to Short-Time Hydraulic Pressure of Plastic Pipe, Tubing, and Fittings
- D1600 Terminology for Abbreviated Terms Relating to Plastics (Withdrawn 2024)³
- D1898 Practice for Sampling of Plastics (Withdrawn 1998)³
- D2122 Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings
- D2765 Test Methods for Determination of Gel Content and Swell Ratio of Crosslinked Ethylene Plastics
- D2837 Test Method for Obtaining Hydrostatic Design Basis for Thermoplastic Pipe Materials or Pressure Design Basis for Thermoplastic Pipe Products
- D3895 Test Method for Oxidative-Induction Time of Polyolefins by Differential Scanning Calorimetry

¹ This specification is under the jurisdiction of ASTM Committee F17 on Plastic Piping Systems and is the direct responsibility of Subcommittee F17.26 on Olefin Based Pipe.


Current edition approved Feb. 1, 2024. Published February 2024. Originally approved in 1984. Last previous edition approved 2023 as F876 – 23a. DOI: 10.1520/F0876-24.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

*A Summary of Changes section appears at the end of this standard

TABLE 1 Thermoplastic Tubing Material Designation Code Cells for SDR9 PEX

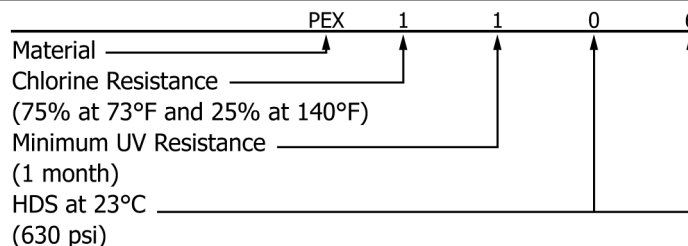

Property	Standard	0	1	2	3	4	5	6	7	8	9
Chlorine Resistance	F2023	Not tested or rated	75 % at 73°F and 25 % at 140°F	Reserved	50 % at 73°F and 50 % at 140°F	Reserved	100 % at 140°F	...	...	...	...
Minimum UV Resistance	F2657	Not tested or rated	1 month	3 months	6 months	...	...	...	...	...	...
HDS for water at 73°F	...	...	...	...	...	...	...	630	...	800	...

Thermoplastic Tubing Material Designation Code—For example ASTM F876 PEX tubing marked with the material designation code PEX 1106 is a PEX tubing meeting the chlorine resistance requirement for 25 % of the time at 140 °F and 75% of the time at 73 °F having a Minimum UV resistance of 1 month and having an HDS for water at 73 °F of 630 psi (HDB of 1250 psi).

F412 Terminology Relating to Plastic Piping Systems

F877 Specification for Crosslinked Polyethylene (PEX) Hot- and Cold-Water Distribution Systems

F1281 Specification for Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe

F2023 Test Method for Evaluating the Oxidative Resistance of Crosslinked Polyethylene (PEX) Pipe, Tubing and Systems to Hot Chlorinated Water

F2657 Test Method for Outdoor Weathering Exposure of Crosslinked Polyethylene (PEX) Tubing

F3203 Test Method for Determination of Gel Content of Crosslinked Polyethylene (PEX) Pipes and Tubing

2.2 ANSI Standard:

B36.10 Standards Dimensions of Steel Pipe (IPS)⁴

2.3 Federal Standard:

FED-STD-123 Marking for Shipment (Civil Agencies)⁵

2.4 Military Standard:

MIL-STD-129 Marking for Shipment and Storage⁵

2.5 NSF Standard:

NSF/ANSI 14 for Plastic Piping Components and Related Materials⁶

NSF/ANSI/CAN 61 Drinking Water System Components – Health Effects

2.6 ISO Standards:⁷

ISO 1167 Thermoplastics pipes, fittings and assemblies for the conveyance of fluids -- Determination of the resistance

to internal pressure -- Part 1: General method

ISO 13760 Plastics pipes for the conveyance of fluids under pressure -- Miner's rule -- Calculation method for cumulative damage

ISO 15875 Plastics piping systems for hot and cold water installations -- Crosslinked polyethylene (PE-X) -- Part 1: General

ISO R 161-1690 Pipes of Plastic Materials for the Transport of Fluids (Outside Diameters and Nominal Pressures) Part 1, Metric Series

2.7 PPI Standard:⁸

PPI TR-3 Policies and Procedures for Developing Hydrostatic Design Basis (HDB), Hydrostatic Design Stresses (HDS), Pressure Design Basis (PDB), Strength Design Basis (SDB), Minimum Required Strength (MRS) Ratings, and Categorized Required Strength (CRS) for Thermoplastic Piping Materials or Pipe

PPI TR-4 PPI Listing of Hydrostatic Design Basis (HDB), Strength Design Basis (SDB), Pressure Design Basis (PDB) and Minimum Required Strength (MRS) Ratings for Thermoplastic Piping Materials or Pipe

3. Terminology

3.1 Definitions—Definitions are in accordance with Terminology **F412**, and abbreviations are in accordance with Terminology **D1600**, unless otherwise specified. The abbreviation for crosslinked polyethylene is PEX. Plastic tubing denotes a particular diameter schedule of plastic pipe in which outside diameter of the tubing is equal to the nominal size plus 1/8 in. Plastic pipe outside diameter schedule conforms to ANSI B36.10.

⁴ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

⁵ DLA Document Services Building 4/D 700 Robbins Avenue Philadelphia, PA 19111-5094 <http://quicksearch.dla.mil/>

⁶ Available from NSF International, P.O. Box 130140, 789 N. Dixboro Rd., Ann Arbor, MI 48113-0140, <http://www.nsf.org>.

⁷ Available from International Organization for Standardization (ISO), ISO Central Secretariat, Chemin de Blandonnet 8, CP 401, 1214 Vernier, Geneva, Switzerland, <https://www.iso.org>.

⁸ Plastics Pipe Institute (PPI), 105 Decker Court, Suite 825 Irving TX, 75062. <http://www.plasticpipe.org>